

Atecpool MaxFlow Self-priming Pump

Atecpool MaxFlow

Self priming pump for above or inground swimming pools. Reinforced fiberglass body for maximum durability. Equipped with an advanced hydraulic design that enables high performance and reduces the noise to the minimum. Powerful motor with inbuilt thermal protector. Double protection to isolate water from electricity.



- 1 Self-Priming at 2 m
- 2 IP55
- 3 Class F (155)
- 4 Thermal Protection
- 5 CE and TÜV Certified
- 6 Connection of suction and return at G2-3/4 for 63 mm bush connection.


Atecpool MaxFlow Specification

Code	Power		Manometric Height wcm										
	HP	kW	2	4	6	8	10	12	14	16	18	20	22
ATECS5M	0.5	0.37	11	8	4	-	-	-	-	-	-	-	-
ATECS9M	0.75	0.55	-	13	11	8	3	-	-	-	-	-	-
ATECS9T			-	-	-	-	-	-	-	-	-	-	-
ATECS11M	1	0.75	-	20	18	15	12	6	-	-	-	-	-
ATECS11T			-	-	-	-	-	-	-	-	-	-	-
ATECS15M	1.5	1.1	-	-	20	18	15	11	3	-	-	-	-
ATECS15T			-	-	-	-	-	-	-	-	-	-	-
ATECS19M	2	1.5	-	-	25	23	21	18	15	9	-	-	-
ATECS19T			-	-	-	-	-	-	-	-	-	-	-
ATECS30M	3	2.2	-	-	33	31	29	26	23	20	15	-	-
ATECS30T			-	-	-	-	-	-	-	-	-	-	-



Note:
 - Model (M)
 Mono Phase 220-240V / 50 Hz
 - Model (T)
 Tri Phase 380-400V / 50 Hz


Dimensions

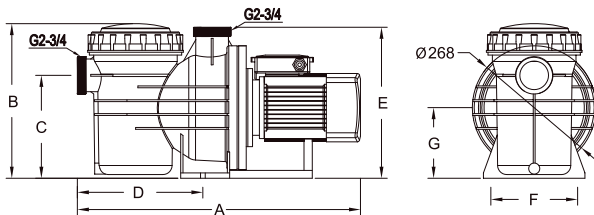

	A	B	C	D	E	F	G
ATECS5	520	331	225	225	308	159	142
ATECS9	520	331	225	225	308	159	142
ATECS11	603	335	222	272	325	188	153
ATECS15	603	335	222	272	325	188	153
ATECS19	603	335	222	272	325	188	153
ATECS30	640	335	222	272	325	188	153

Performance Curve

Models: ATECS5M / ATECS9M / ATECS11M

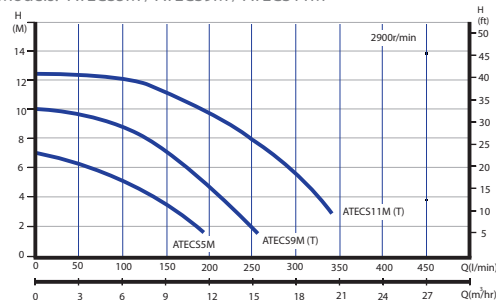

Models: ATECS15M / ATECS19M / ATECS30M

