

Pool Fittings

Standard Skimmer ABS


Standard Skimmer ABS

Manufactured in UV treated white ABS with top square lid and frame. With flap and flow regulation plug. Supplied with extra strong plastic basket with handle. Skimmer has an option of 3 connection sizes: 1½" internal threaded, 2" threaded and 50mm diameter for gluing. Overflow connection of 40mm diameter. Max. Recommended flow is 5m³/h. For optimum results it is recommended to use 1 skimmer per 25m² of pool surface area. The skimmer suction can also be used for vacuum cleaning the pool floor.

Standard Skimmer for concrete




Code	Description	Weight	Volume
		(kg)	(m³)
01590010	Standard Skimmer ABS Concrete	3.15	0.047

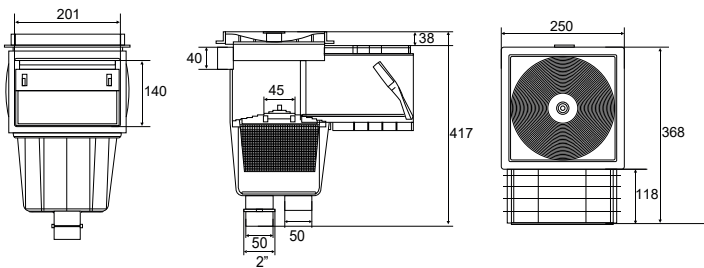

Standard Skimmer with Extended Throat for concrete



Code	Description	Weight	Volume
		(kg)	(m³)
01590010-1	Standard Skimmer ABS Concrete with Extended Throat	4.10	0.049

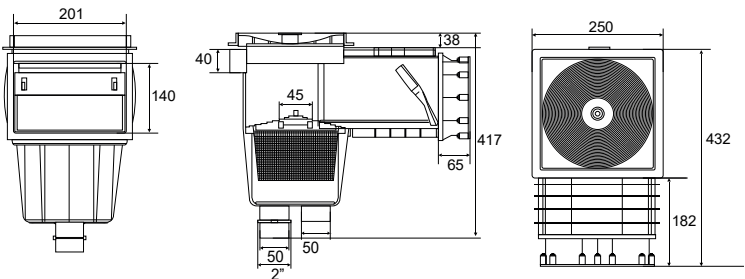

Standard Skimmer for Liner

Supplied with elastic adhesive gasket, flange and screws for liner fixing.



Code	Description	Weight	Volume
		(kg)	(m³)
01591011	Standard Skimmer ABS Liner	5.28	0.047

