


Atecpool Niagara


Self-priming pump

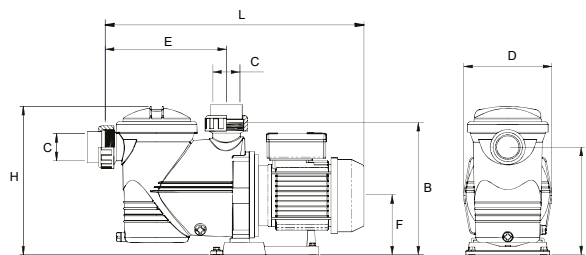

Atecpool Niagara

- Self-priming electric pump for swimming pools, with built-in pre-filter.
- Pre-filter with transparent lid in polycarbonate that allows easy observation of the pre-filter basket.
- The pre-filter is closed by means of a thread.
- Pump body made in polypropylene reinforced with fibreglass, resistant to the chemical products in the swimming pool.
- Pump body lid and diffuser in Noryl.
- Noryl impeller with shaft in stainless steel AISI 316L.
- Mechanical seal in graphite and ceramics.
- Motor shaft manufactured in stainless steel AISI 316L.
- Enclosed motor, totally silent, with IP-55 protection, at 3,000 rpm 230V - 50Hz single-phase or 230 / 400V - 50Hz three-phase.
- Possibility of 60Hz upon request.
- Connections of suction and return at 2 3/4" for Ø 63 mm bush connections.

Performance graph

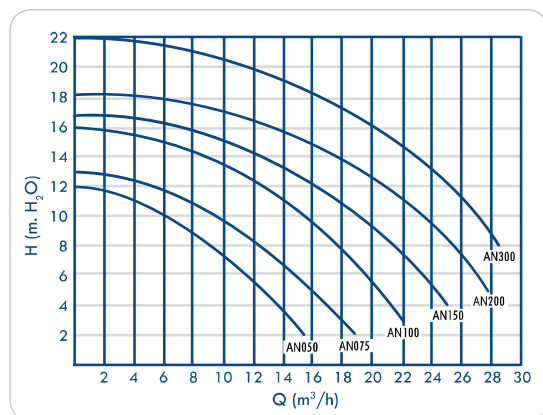

Code	Power		Manometric Height wcm										
	HP	kW	2	4	6	8	10	12	14	16	18	20	22
AN050M AN050T	0,5	0,37	15	14	11	9	6	-	-	-	-	-	-
AN075M AN075T	0,75	0,55	19	17	14	12	9	5	-	-	-	-	-
AN100M AN100T	1	0,75	-	21	20	18	16	12	9	-	-	-	-
AN150M AN150T	1,5	1,10	-	25	23	21	19	16	14	7	-	-	-
AN200M AN200T	2	1,50	-	-	27	25	23	21	18	14	6	-	-
AN300M AN300T	3	2,20	-	-	-	28	27	25	23	20	17	12	3

Code	Power		Dimensions								Weight	Volume m³
	HP	kW	A	B	C	D	E	F	H	L	kg	
AN050M AN050T	0,5	0,37	250	312	Ø63	205	282	140	348	565	12,5	0,060
AN075M AN075T	0,75	0,55	250	312	Ø63	205	282	140	348	565	13	0,060
AN100M AN100T	1	0,75	250	312	Ø63	205	282	140	348	565	14	0,060
AN150M AN150T	1,5	1,10	250	312	Ø63	205	282	140	348	590	17	0,060
AN200M AN200T	2	1,50	250	312	Ø63	205	282	140	348	605	19,5	0,060
AN300M AN300T	3	2,20	250	312	Ø63	205	282	140	348	625	22,5	0,060